FIG. 1

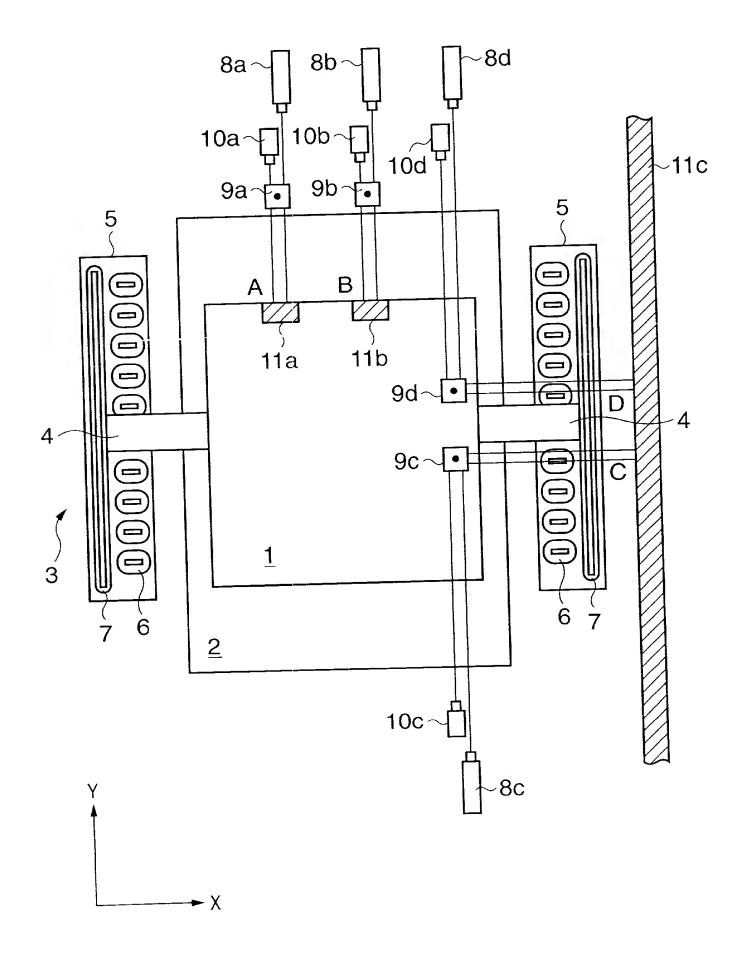


FIG. 2

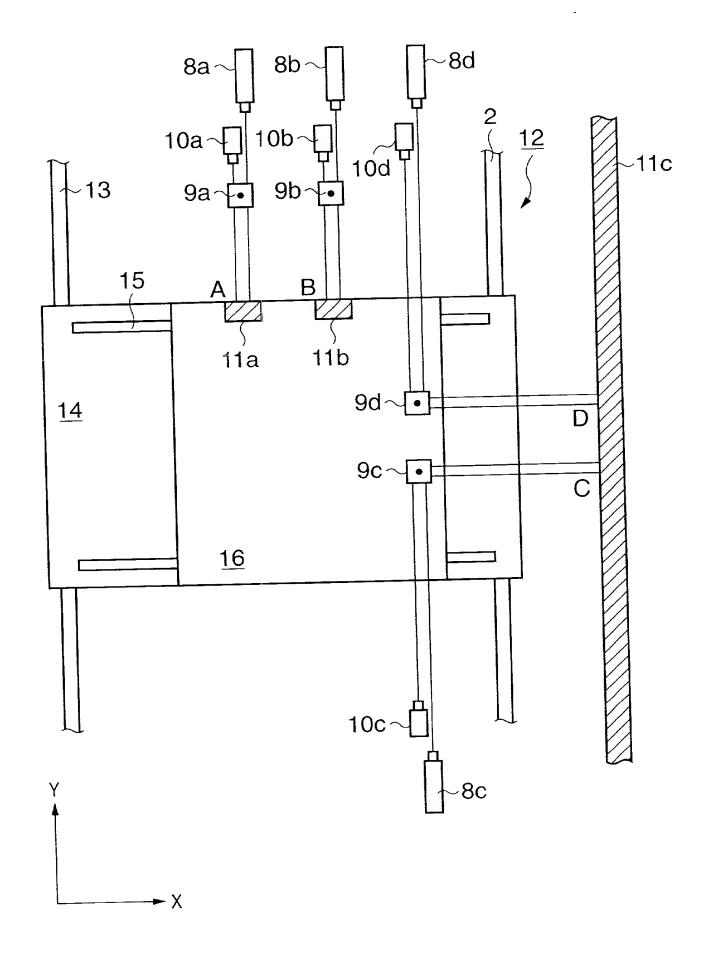


FIG. 3A

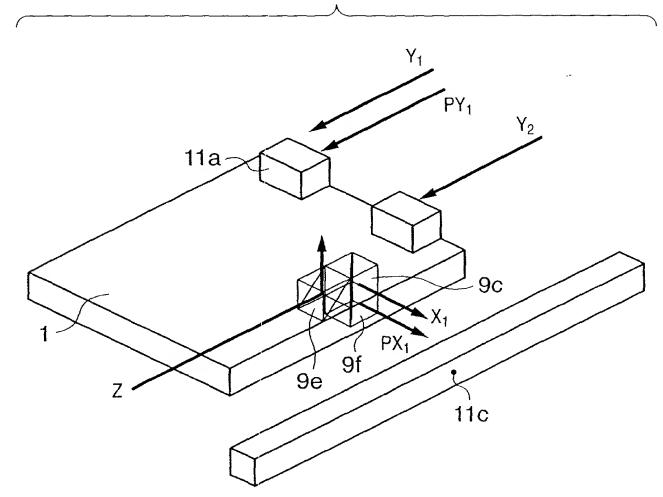


FIG. 3B

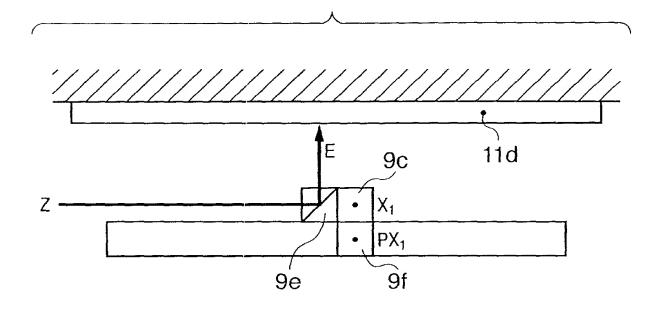


FIG. 4

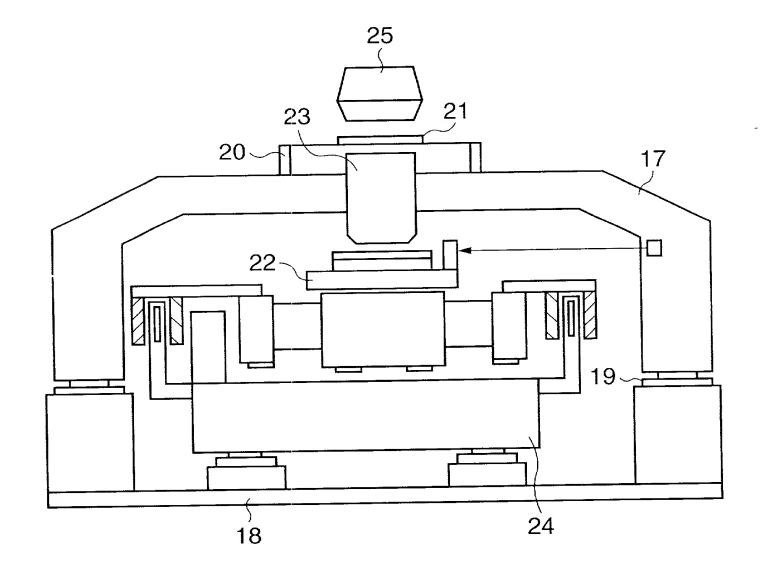


FIG. 5

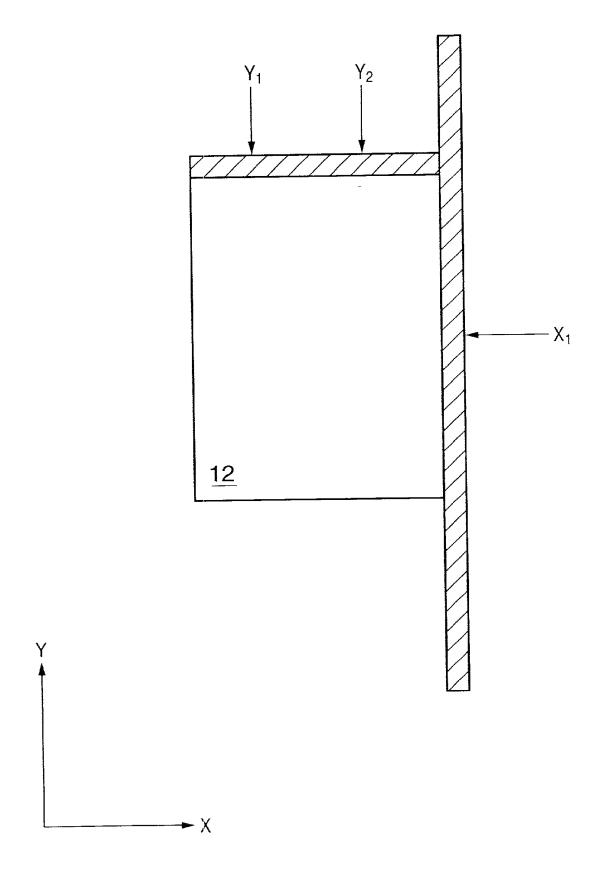


FIG. 6

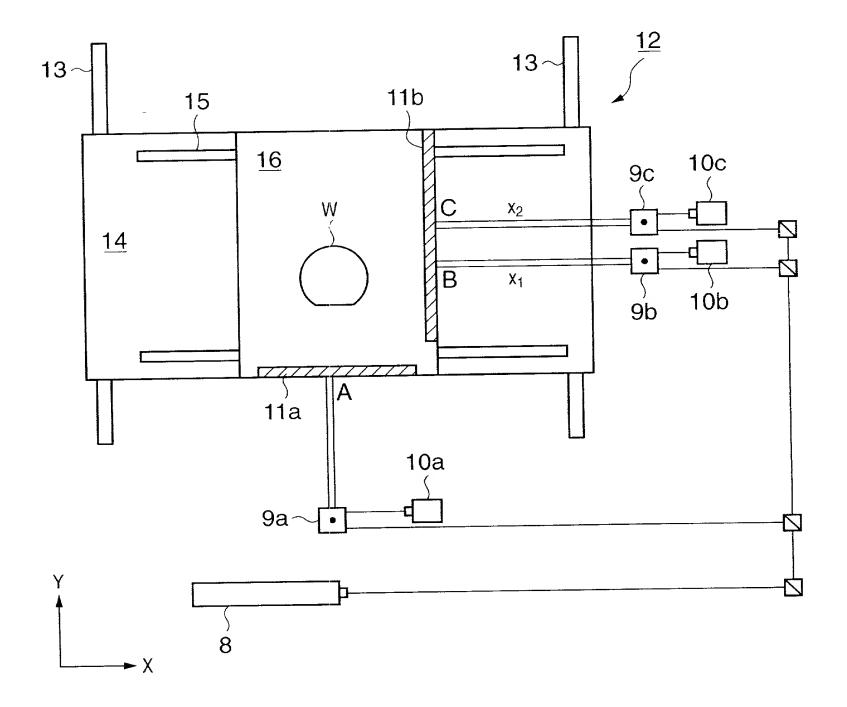


FIG. 7

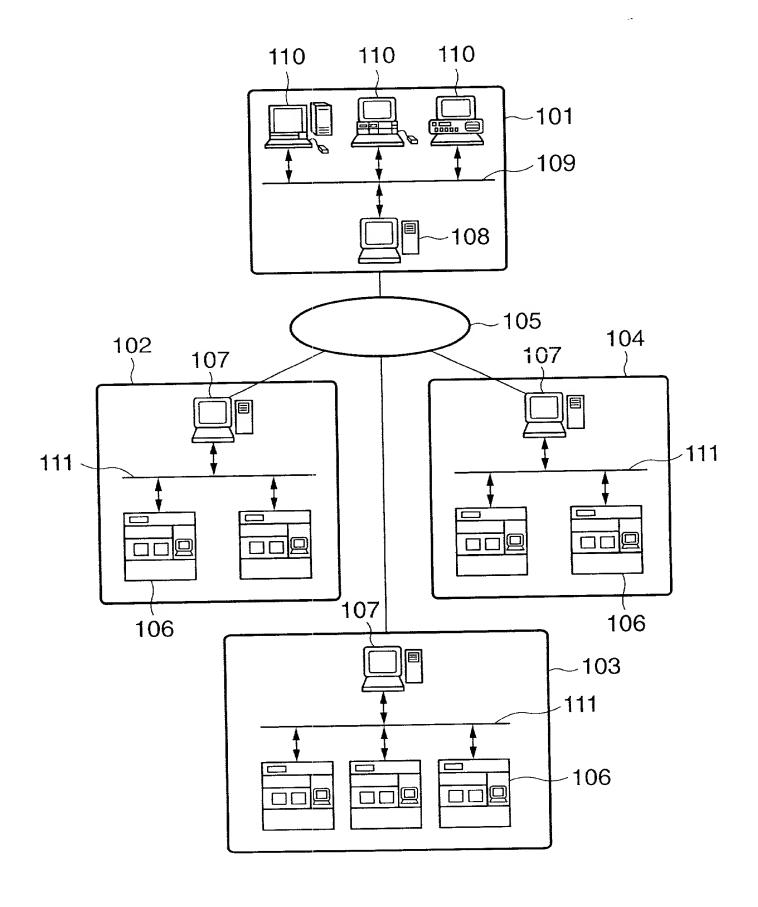


FIG. 8


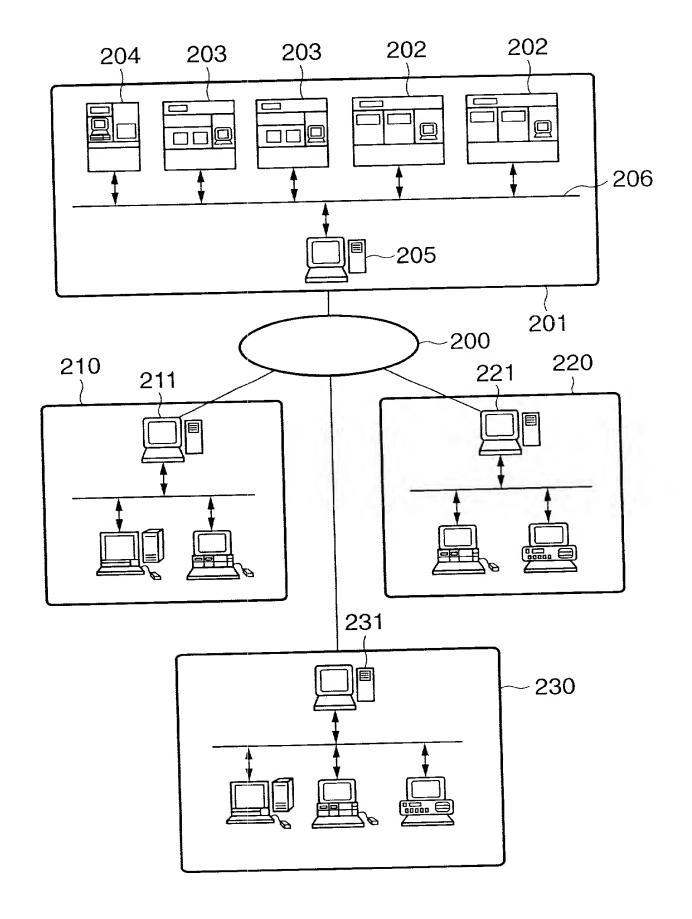


FIG. 9


URL http://www.maintain.co.jp/db/input.html	
TROUBLE DB INPUT WINDOW	
OCCURRENCE DATE 2000/3/15 404	
TYPE OF APPARATUS ******** ~401	ļ
SUBJECT OPERATION ERROR (START-UP ERROR) 403	
APPARATUS S/N 465NS4580001 402	
DEGREE OF URGENCY D 405	
SYMPTOM LED KEEPS FLICKERING AFTER POWER-ON 406	
REMEDY POWER ON AGAIN 企	
(PRESS RED BUTTON IN ACTIVATION) 407	İ
PROGRESS INTERIM HAS BEEN DONE	
小 - 408	}
SEND (RESET) 410 411 412	
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUI	DE

FIG. 10

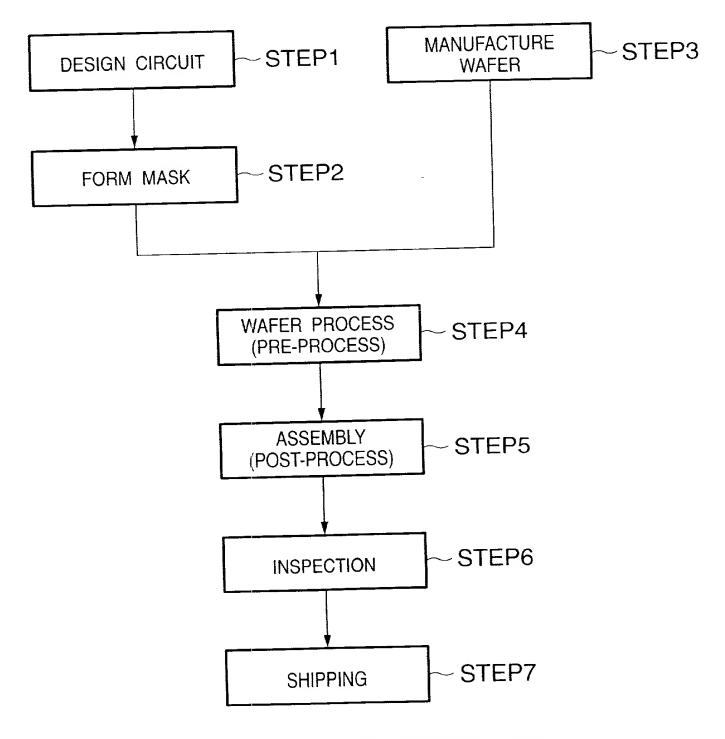

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 11

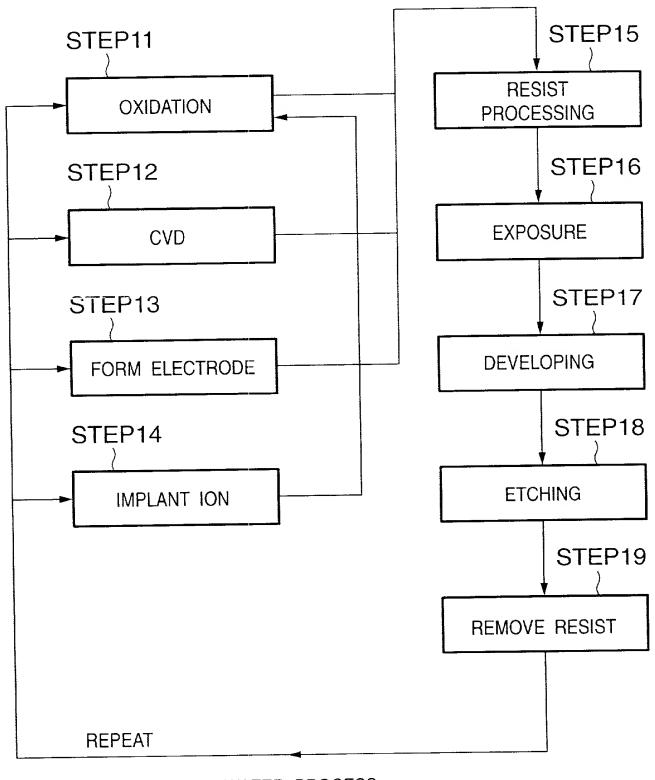

WAFER PROCESS